




EISELE

Knowledge in motion

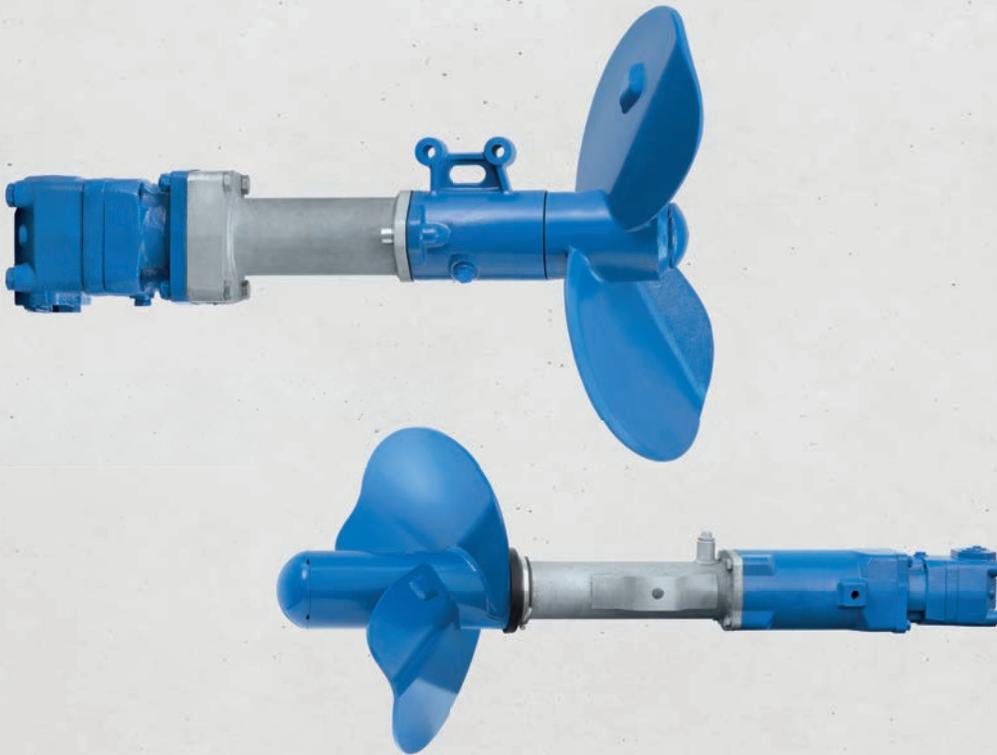

Agriculture

Hydraulic mixers HP

The hydraulically driven Eisele HP mixers operate independently of electricity, and their flow-optimised thrust propellers achieve very high mixing performance.

Their rugged design with highly wear resistant mechanical seal guarantees a long service life at low acquisition cost.



7.5 kW to 33.5 kW

Benefits

- No power supply necessary
- Flow-optimised thrust propeller
- Highly wear resistant mechanical seal
- Rugged design
- For stationary or mobile use

Hydraulic mixers HP



Open lagoon



Slalom system



Tank with foil roof



Tank with concrete ceiling



Open tank



Steel tank

Features

- Various hydraulic drives
- Wide-blade thrust propeller
- For mobile purposes, e.g. attachment to crane or telescopic loader

Accessories

- Carriage for installation set EGR (HP 10)
- Suitable hydraulic hoses

Technical Data

Type	Propeller Ø	Total length	TECHNICAL DATA OF THE HYDRAULIC MOTOR				
			Speed	Performance		Pressure drop	Oil flow
HP	mm	mm	rpm	kW	hp	bar	L / min
10 - 100	485	437	470	7.5	10.0	120	50
10 - 200	490	437	625	15.0	20.0	80	125
45 - 160	500	1,278	590	26.5	35.0	200	100
45 - 200	500	1,283	590	33.5	44.5	200	125
45 - 250	500	1,289	470	33.5	44.5	200	125
65 - 250	600	1,289	470	33.5	44.5	200	125

Performance data are related to water. Specifications and illustrations are non-binding.